


轴向金属化聚酯膜电容器 Metallized polyester film capacitor(Axial-type)

■ 外形图 Outline Drawing

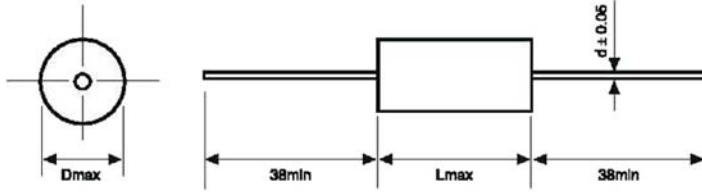

■ 特点

- 金属化聚酯膜, 卷绕结构
- 体积小, 重量轻, 自愈性能优异
- 外包装聚酯胶带纸, 两端灌注环氧树脂

■ 主要用途

- 隔直, 旁路和耦合(去耦)

■ 技术要求 Specifications

■ Features

- Metallized polyester film, non-inductive wound construction
- Small size, light weight, excellent self-healing property
- Wrapped with polyester adhesive tape and ends filled

■ Typical Applications

- Suitable for blocking, by-pass, coupling, and decoupling

引用标准 Reference Standard	GB/T 7332 (IEC 60384-2)					
气候类别 Climatic Category	55/105/21					
额定温度 Rated Temperature	85℃					
工作温度范围 Operating Temperature Range	-55℃~105℃ (+85℃ to +105℃: decreasing factor 1.25% per °C for UR)					
额定电压 Rated Voltage	50V、63V、100V、250V、400V、630V、1 000V					
电容量范围 Capacitance Range	0.0010μF~10.0μF					
电容量偏差 Capacitance Tolerance	± 5%(J), ± 10%(K), ± 20%(M)					
耐电压 Voltage Proof	1.6UR (5s)					
损耗角正切 Dissipation Factor	< 1.0% (20℃, 1kHz)					
绝缘电阻 Insulation Resistance	> 30 000MΩ, CR < 0.33μF > 10 000s CR > 0.33μF (20℃, 1min)					
最大脉冲爬升速率Maximum Pulse Rise Time (dV/dt): 若实际工作电压U比额定电压UR低, 电容器可工作在更高的dV/dt场合。这样dV/dt允许值应为右表值乘以UR/U。 If the working voltage (U) is lower than the rated voltage (UR),the capacitor can be worked at a higher dV/dt.In this case, the maximum allowed dV/dt is obtain by multiplying the right value with UR/U.	UR(V)	dV/dt(V/μs)				
			L=12.0	L=14.5	L=20.0	L=27.5
	50/63	6	6	2	1.5	1
	100	9	9	3	2	1
	250	20	20	8	5	2.5
	400	30	30	10	7	4
	630	40	40	15	10	6
1 000	50	50	25	12	8	

产品编码说明 Part number system

18 位产品代码如下(The 18 digits part number is formed as follow):

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

C	2	0															
---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

第 1~3 位 型号代码(Digit 1~3 Type Code):

型号代码:C20

第 4~5 额定电压代码(Digit 4~5 Rated Voltage Code):

	A	B	C	D	E	F	G	H	J	K	L	M	N
1			16	20				50	63			1100	
2	100	125	160	200	250	315	400	500	630	800	120		
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	1200	1400	

	P	Q	R	S	T	U	V	W	X	Y		
1	240	300	330	440	540	600	700	850	900			
2	275	305	350	450	520		760					
3	280	310		480								

说明: 参考日本 JIS 标准, 字母加数位表示交流, 数字加字母表示直流, 例如 A2 表示 100VAC, 2A 表示 100VDC

Explanation: Refer to JIS standard, Letter and then number indicate AC, but number and then Letter indicate DC, for example, 2A indicate 100VDC, A2 indicate 100VAC.

第 6~8 容值代码(Digit 6~8 Capacitance Expressed in 3-digit code 3 Code):

The first 2 digits indicate significant figures, and the third digit specifies the number of zero to follow.

前两位表示基数, 第三个数字表示其后零的个数

This gives the capacitance in picofarads. 容量值单位为皮法

For examples 举例: $102=10 \times 10^2 \text{PF}=1,000 \text{PF}=1.0 \text{nF}=0.001 \mu\text{F}$ $105=10 \times 10^5 \text{PF}=1,000,000 \text{PF}=1000 \text{nF}=1 \mu\text{F}$

第 9 容量偏差代码(Digit 9 Capacitance Tolerance Code):

公差 Tolerance	±5%	±10%
代码 Code	J	K

第 10~11 两个数位的脚距代码(Digit 10~11 Pitch expressed by Case two digits Code):

Powder Coating Type 粉涂型

Pitch 脚距	2.5	5.0	7.5	10	15	20	22.5	27.5
Case No. 脚距代码	02	05	07	10	15	20	22	27

Axial Type 轴向型

Code 代码	Axial Type 轴向型
A1	轴向椭圆形
A2	轴向圆形

第 12 引线加工型代码(Digit 12 Lead Form Code):

Lead Type

Code 代码	L	H	K	N	M	T	S
Lead Type 引线型式	长脚	短脚	内弯青蛙脚	内弯直脚	外弯直脚	Taping	Customer Special Require

第 13~15 引线长度和偏差以 3 个数字代码表示

Digit 13~14 Lead Length(Straight) and Tolerance of Lead Length(straight): Expressed in 3-Letter Code

Example 举例: Code 代码 035:35/10=3.5mm 230:230/10=23mm

第 16~18 内部特征码

Digit 16~18 Internal use Code

■外形尺寸 Dimensions (mm)

50Vdc(30Vac)/63Vdc(40Vac)#					100Vdc(63Vac)					250Vdc(160Vac)				
C _R (μF)	D max	L max	d	Part number	C _R (μF)	D max	L max	d	Part number	C _R (μF)	D max	L max	d	Part number
0.33	5.2	12.0	0.6	C201J334JA2*****	0.068	5.2	12.0	0.6	C202A683JA2*****	0.047	5.2	12.0	0.6	C202E473JA2*****
0.39	5.5	12.0	0.6	C201J394JA2*****	0.082	5.2	12.0	0.6	C202A823JA2*****	0.056	5.2	12.0	0.6	C202E563JA2*****
0.47	5.5	14.5	0.6	C201J474JA2*****	0.10	5.2	12.0	0.6	C202A104JA2*****	0.068	5.2	12.0	0.6	C202E683JA2*****
0.56	6.0	14.5	0.6	C201J564JA2*****	0.12	5.2	12.0	0.6	C202A124JA2*****	0.082	5.2	12.0	0.6	C202E823JA2*****
0.68	6.0	14.5	0.6	C201J684JA2*****	0.15	5.2	12.0	0.6	C202A154JA2*****	0.10	5.5	14.5	0.6	C202E104JA2*****
0.82	6.5	14.5	0.6	C201J824JA2*****	0.18	5.2	12.0	0.6	C202A184JA2*****	0.12	5.5	14.5	0.6	C202E124JA2*****
1.0	7.0	14.5	0.8	C201J105JA2*****	0.22	5.2	12.0	0.6	C202A224JA2*****	0.15	5.5	14.5	0.6	C202E154JA2*****
1.2	7.0	14.5	0.8	C201J125JA2*****	0.27	5.2	12.0	0.6	C202A274JA2*****	0.18	5.5	14.5	0.6	C202E184JA2*****
1.5	6.7	20.0	0.8	C201J155JA2*****	0.33	6.0	14.5	0.6	C202A334JA2*****	0.22	6.0	14.5	0.6	C202E224JA2*****
1.8	7.0	20.0	0.8	C201J185JA2*****	0.39	6.0	14.5	0.6	C202A394JA2*****	0.27	6.5	14.5	0.6	C202E274JA2*****
2.2	7.5	20.0	0.8	C201J225JA2*****	0.47	6.0	14.5	0.6	C202A474JA2*****	0.33	6.5	20.0	0.6	C202E334JA2*****
2.7	8.5	20.0	0.8	C201J275JA2*****	0.56	6.0	14.5	0.8	C202A564JA2*****	0.39	6.5	20.0	0.6	C202E394JA2*****

备注:

1. "*****"表示内部特征代码.Internal use.

2. "#"当额定电压为50Vdc时, 第4-5位分别是1H."#"when the rated voltage is 50Vdc,the ding4-5 is 1H.

■外形尺寸 Dimensions (mm)

50Vdc(30Vac)/63Vdc(40Vac)#				
C _R (μF)	D max	L max	d	Part number
3.3	9.0	20.0	0.8	C201J335JA2*****
3.9	9.5	20.0	0.8	C201J395JA2*****
4.7	8.5	27.5	0.8	C201J475JA2*****
5.6	9.0	27.5	0.8	C201J565JA2*****
6.8	10.0	27.5	0.8	C201J685JA2*****
8.2	10.5	27.5	0.8	C201J825JA2*****
10.0	11.0	33.0	0.8	C201J106JA2*****

100Vdc(63Vac)				
C _R (μF)	D max	L max	d	Part number
0.68	6.8	14.5	0.8	C202A684JA2*****
0.82	7.0	14.5	0.8	C202A824JA2*****
1.0	7.7	20.0	0.8	C202A105JA2*****
1.2	7.0	20.0	0.8	C202A125JA2*****
1.5	8.0	20.0	0.8	C202A155JA2*****
1.8	8.5	20.0	0.8	C202A185JA2*****
2.2	9.0	20.0	0.8	C202A225JA2*****
2.7	9.5	20.0	0.8	C202A275JA2*****
3.3	9.5	27.5	0.8	C202A335JA2*****
3.9	9.5	27.5	0.8	C202A395JA2*****
4.7	10.0	33.0	0.8	C202A475JA2*****
5.6	10.5	33.0	0.8	C202A565JA2*****
6.8	11.5	33.0	0.8	C202A685JA2*****
8.2	12.5	33.0	0.8	C202A825JA2*****
10.0	13.5	33.0	0.8	C202A106JA2*****

250Vdc(160Vac)				
C _R (μF)	D max	L max	d	Part number
0.47	7.0	20.0	0.8	C202E474JA2*****
0.56	7.5	20.0	0.8	C202E564JA2*****
0.68	8.0	20.0	0.8	C202E684JA2*****
0.82	8.5	20.0	0.8	C202E824JA2*****
1.0	9.0	20.0	0.8	C202E105JA2*****
1.2	8.5	27.5	0.8	C202E125JA2*****
1.5	9.0	27.5	0.8	C202E155JA2*****
1.8	9.5	27.5	0.8	C202E185JA2*****
2.2	11.0	33.0	0.8	C202E225JA2*****
2.7	12.0	33.0	0.8	C202E275JA2*****
3.3	13.0	33.0	0.8	C202E335JA2*****
3.9	14.5	33.0	0.8	C202E395JA2*****
4.7	15.5	33.0	0.8	C202E475JA2*****
5.6	16.5	33.0	1.0	C202E565JA2*****
6.8	18.5	33.0	1.0	C202E685JA2*****
8.2	2.0	33.0	1.0	C202E825JA2*****
10.0	22.0	33.0	1.0	C202E106JA2*****

400Vdc(200Vac)				
C _R (μF)	D max	L max	d	Part number
0.010	5.2	12.0	0.6	C202G103JA2*****
0.012	5.2	12.0	0.6	C202G123JA2*****
0.015	5.2	12.0	0.6	C202G153JA2*****
0.018	5.2	12.0	0.6	C202G183JA2*****
0.022	5.2	12.0	0.6	C202G223JA2*****
0.027	5.2	12.0	0.6	C202G273JA2*****
0.033	5.2	12.0	0.6	C202G333JA2*****
0.039	5.2	14.5	0.6	C202G393JA2*****
0.047	6.5	14.5	0.6	C202G473JA2*****
0.056	6.5	14.5	0.6	C202G563JA2*****
0.068	6.5	14.5	0.6	C202G683JA2*****
0.082	7.0	14.5	0.8	C202G823JA2*****
0.10	7.5	14.5	0.8	C202G104JA2*****
0.12	8.0	14.5	0.8	C202G124JA2*****
0.15	7.0	20.0	0.8	C202G154JA2*****
0.18	7.0	20.0	0.8	C202G184JA2*****
0.22	7.5	20.0	0.8	C202G224JA2*****
0.27	8.0	20.0	0.8	C202G274JA2*****
0.33	9.0	20.0	0.8	C202G334JA2*****
0.39	9.5	20.0	0.8	C202G394JA2*****
0.47	8.5	27.5	0.8	C202G474JA2*****
0.56	9.0	27.5	0.8	C202G564JA2*****
0.68	10.0	27.5	0.8	C202G684JA2*****
0.82	10.5	27.5	0.8	C202G824JA2*****
1.0	10.5	33.0	0.8	C202G105JA2*****
1.2	11.5	33.0	0.8	C202G125JA2*****
1.5	12.5	33.0	0.8	C202G155JA2*****
1.8	13.5	33.0	0.8	C202G185JA2*****
2.2	14.5	33.0	0.8	C202G225JA2*****
2.7	16.0	33.0	33.0	C202G275JA2*****
3.3	17.5	33.0	33.0	C202G335JA2*****

630Vdc(220Vac)@				
C _R (μF)	D max	L max	d	Part number
0.0010	5.2	12.0	0.6	C202J102JA2*****
0.0012	5.2	12.0	0.6	C202J122JA2*****
0.0015	5.2	12.0	0.6	C202J152JA2*****
0.0018	5.2	12.0	0.6	C202J182JA2*****
0.0022	5.2	12.0	0.6	C202J222JA2*****
0.0027	5.2	12.0	0.6	C202J272JA2*****
0.0033	5.2	12.0	0.6	C202J332JA2*****
0.0039	5.2	12.0	0.6	C202J392JA2*****
0.0047	5.2	12.0	0.6	C202J472JA2*****
0.0056	5.2	12.0	0.6	C202J562JA2*****
0.0068	6.0	12.0	0.6	C202J682JA2*****
0.0082	6.0	12.0	0.6	C202J822JA2*****
0.010	6.0	14.5	0.6	C202J103JA2*****
0.012	6.0	14.5	0.6	C202J123JA2*****
0.015	6.5	14.5	0.6	C202J153JA2*****
0.018	7.0	14.5	0.8	C202J183JA2*****
0.022	7.5	14.5	0.8	C202J223JA2*****
0.027	8.0	14.5	0.8	C202J273JA2*****
0.033	7.0	20.0	0.8	C202J333JA2*****
0.039	7.5	20.0	0.8	C202J393JA2*****
0.047	7.5	20.0	0.8	C202J473JA2*****
0.056	8.0	20.0	0.8	C202J563JA2*****
0.068	8.5	20.0	0.8	C202J683JA2*****
0.082	9.0	20.0	0.8	C202J823JA2*****
0.10	8.0	27.5	0.8	C202J104JA2*****
0.12	8.5	27.5	0.8	C202J124JA2*****
0.15	9.0	27.5	0.8	C202J154JA2*****
0.18	10.0	27.5	0.8	C202J184JA2*****
0.22	10.5	27.5	0.8	C202J224JA2*****
0.27	11.5	27.5	0.8	C202J274JA2*****
0.33	11.0	33.0	0.8	C202J334JA2*****
0.39	12.0	33.0	0.8	C202J394JA2*****
0.47	12.5	33.0	0.8	C202J474JA2*****
0.56	13.5	33.0	0.8	C202J564JA2*****
0.68	14.5	33.0	0.8	C202J684JA2*****
0.82	16.0	33.0	1.0	C202J824JA2*****
1.0	17.5	33.0	1.0	C202J105JA2*****

1000Vdc(250Vac)@				
C _R (μF)	D max	L max	d	Part number
0.0010	5.2	12.0	0.6	C203A102JA2*****
0.0012	5.2	12.0	0.6	C203A122JA2*****
0.0015	5.2	12.0	0.6	C203A152JA2*****
0.0018	5.2	12.0	0.6	C203A182JA2*****
0.0022	5.2	12.0	0.6	C203A222JA2*****
0.0027	5.2	12.0	0.6	C203A272JA2*****
0.0033	5.2	12.0	0.6	C203A332JA2*****
0.0039	5.2	12.0	0.6	C203A392JA2*****
0.0047	5.2	14.5	0.6	C203A472JA2*****
0.0056	5.2	14.5	0.6	C203A562JA2*****
0.0068	5.2	14.5	0.6	C203A682JA2*****
0.0082	6.0	14.5	0.6	C203A822JA2*****
0.010	6.0	20.0	0.6	C203A103JA2*****
0.012	6.0	20.0	0.6	C203A123JA2*****
0.015	6.5	20.0	0.6	C203A153JA2*****
0.018	6.5	20.0	0.6	C203A183JA2*****
0.022	7.0	20.0	0.8	C203A223JA2*****
0.027	7.5	20.0	0.8	C203A273JA2*****
0.033	6.5	27.5	0.8	C203A333JA2*****
0.039	6.5	27.5	0.8	C203A393JA2*****
0.047	7.0	27.5	0.8	C203A473JA2*****
0.056	7.5	27.5	0.8	C203A563JA2*****
0.068	8.0	27.5	0.8	C203A683JA2*****
0.082	8.5	27.5	0.8	C203A823JA2*****
0.10	9.0	27.5	0.8	C203A104JA2*****
0.12	9.5	27.5	0.8	C203A124JA2*****
0.15	9.5	33.0	0.8	C203A154JA2*****
0.18	10.0	33.0	0.8	C203A184JA2*****
0.22	11.0	33.0	0.8	C203A224JA2*****
0.27	12.0	33.0	0.8	C203A274JA2*****
0.33	13.0	33.0	0.8	C203A334JA2*****
0.39	14.0	33.0	0.8	C203A394JA2*****
0.47	15.0	33.0	0.8	C203A474JA2*****

备注:

- 1."*****"表示内部特征代码.Internal use.
- 2."#"当额定电压为50Vdc时,第4-5位分别是1H."#"when the rated voltage is 50Vdc,the ding4-5 is 1H.
- 3."@"不适合跨接线的应用。请参阅Interference抑制电感器。
"@"Not suitable for across-the-line applications.Pls refer to Interference Suppression Capacitors.